

## Axle Assembly Instructions

---

1. Cart will arrive as shown. (Figure 1)



Figure 1

2. Attach wheel with components as shown (Figure 2) in this order:
  - a. Large Washer
  - b. Wheel
  - c. Black Faceplate
  - d. Small Washer
  - e. Hex Nut
  - f. Acorn Nut
3. Repeat on opposite side.
4. If thread rod is not long enough, loosen nuts on the other side

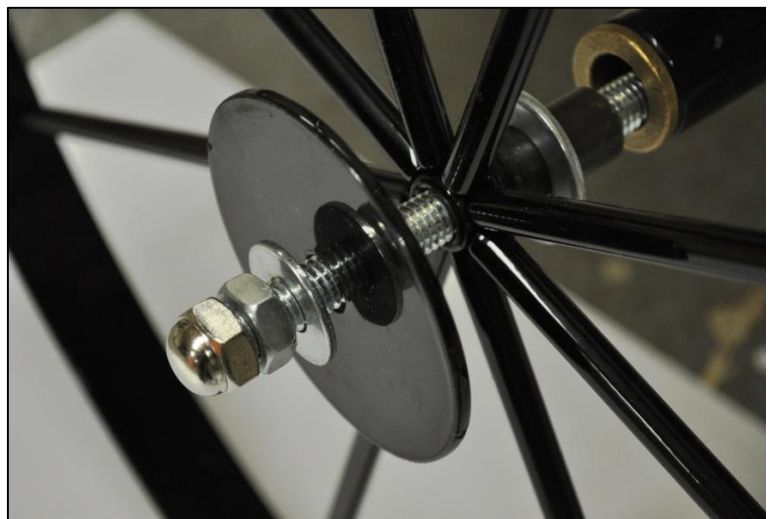


Figure 2

5. Tighten lock nut and acorn nut as shown. (Figure 3)

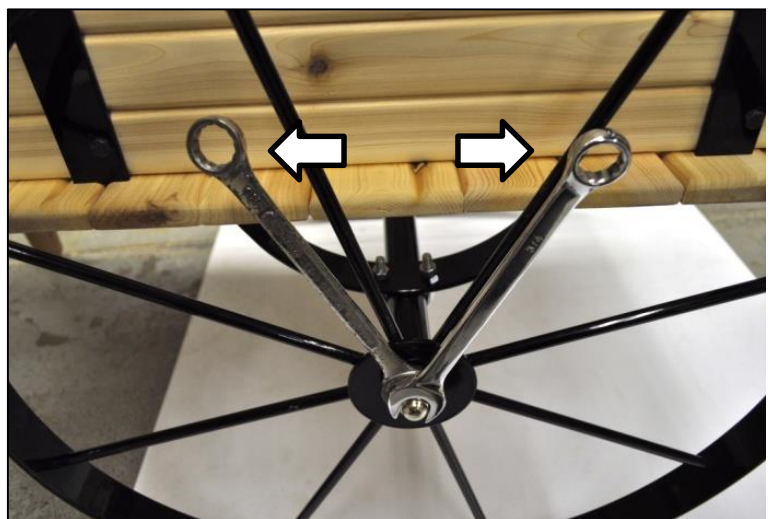


Figure 3